




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |    |   |
|--|----|---|
| (51) International Patent Classification <sup>6</sup> :<br>H04B 7/005  | A1 | (11) International Publication Number: WO 99/66657<br>(43) International Publication Date: 23 December 1999 (23.12.99)  |
| (21) International Application Number: PCT/KR99/00313<br>(22) International Filing Date: 18 June 1999 (18.06.99)<br>(30) Priority Data:<br>1998/22915 18 June 1998 (18.06.98) KR<br>(71) Applicant: SAMSUNG ELECTRONICS CO., LTD. [KR/KR];<br>416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR).<br>(72) Inventors: YUN, Yu, Suk; 954-21, Taechi-dong, Kangnam-gu, Seoul 135-280 (KR). KIM, Young, Ky; Sunkyoung Apt., 12-1401, Taechi-dong, Kangnam-gu, Seoul 135-280 (KR). YOON, Soon, Young; 165, Karak-dong, Songpa-gu, Seoul 138-160 (KR). AHN, Jae, Min; Puleun Samho Apt., 109-303, Irwonpon-dong, Kangnam-gu, Seoul 135-239 (KR).<br>(74) Agent: LEE, Keon, Joo; Mihwa Building, 110-2, Myongryun-dong 4-Ga, Chongro-gu, Seoul 110-524 (KR). |    | (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).<br><br>Published<br>With international search report.<br>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. |

(54) Title: DEVICE AND METHOD FOR COMMUNICATING POWER CONTROL SIGNALS IN MOBILE COMMUNICATION SYSTEM

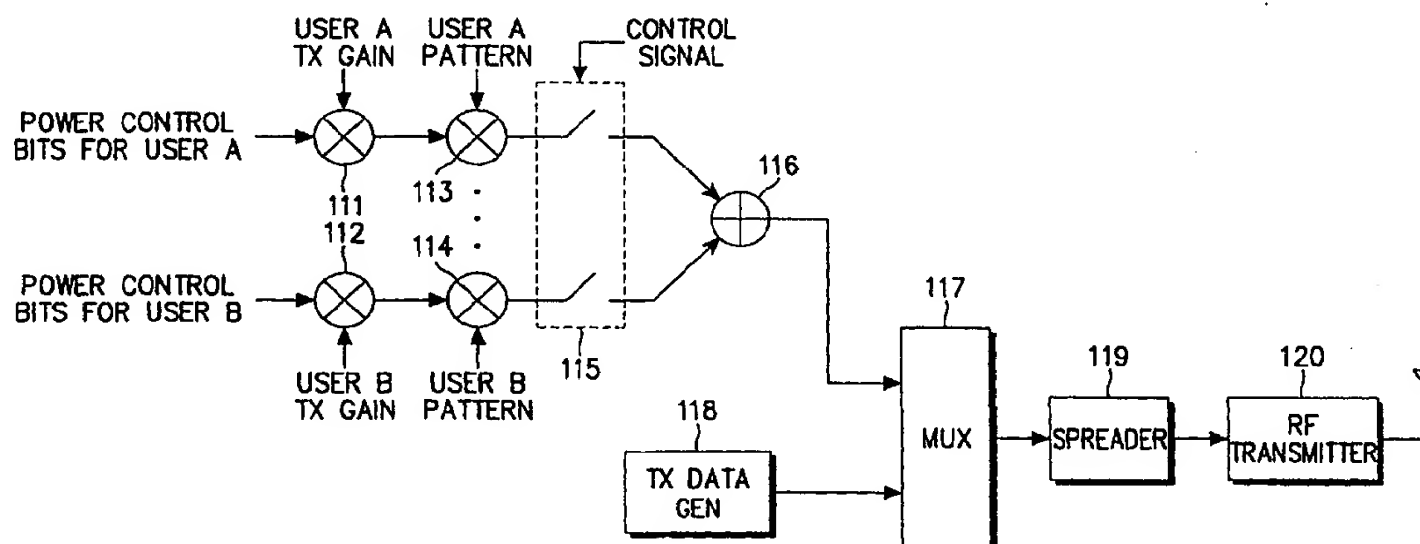

## (57) Abstract

A power control device for a mobile communication system includes a base station transmitter and a mobile station receiver, wherein the base station transmitter includes: a plurality of PCB pattern generators for multiplying PCBs for a plurality of mobile stations by user patterns assigned to the respective mobile stations, to generate PCB patterns for the respective mobile stations, wherein the user patterns are orthogonal with one another; an adder for adding up the PCB patterns from the plural PCB pattern generators to generate a power control signal; and a transmitter for modulating the power control signal received from the adder and transmitting the modulated power control signal, wherein the mobile station receiver includes: a power control signal extractor for extracting the power control signal within a given interval of a reception signal received on a single code channel, wherein PCB patterns for a plurality of mobile stations are added to the power control signal; a PCB pattern generator for multiplying the power control signal by the user pattern assigned to the mobile station itself, to extract the PCB pattern of the mobile station; and a decider for generating PCBs in accordance with a signal level of the extracted PCB pattern.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|           |                          |           |  |           |  |           |                          |
|-----------|--------------------------|-----------|--|-----------|--|-----------|--------------------------|
| <b>AL</b> | Albania                  | <b>ES</b> | Spain                                    | <b>LS</b> | Lesotho                                      | <b>SI</b> | Slovenia                 |
| <b>AM</b> | Armenia                  | <b>FI</b> | Finland                                  | <b>LT</b> | Lithuania                                    | <b>SK</b> | Slovakia                 |
| <b>AT</b> | Austria                  | <b>FR</b> | France                                   | <b>LU</b> | Luxembourg                                   | <b>SN</b> | Senegal                  |
| <b>AU</b> | Australia                | <b>GA</b> | Gabon                                    | <b>LV</b> | Latvia                                       | <b>SZ</b> | Swaziland                |
| <b>AZ</b> | Azerbaijan               | <b>GB</b> | United Kingdom                           | <b>MC</b> | Monaco                                       | <b>TD</b> | Chad                     |
| <b>BA</b> | Bosnia and Herzegovina   | <b>GE</b> | Georgia                                  | <b>MD</b> | Republic of Moldova                          | <b>TG</b> | Togo                     |
| <b>BB</b> | Barbados                 | <b>GH</b> | Ghana                                    | <b>MG</b> | Madagascar                                   | <b>TJ</b> | Tajikistan               |
| <b>BE</b> | Belgium                  | <b>GN</b> | Guinea                                   | <b>MK</b> | The former Yugoslav<br>Republic of Macedonia | <b>TM</b> | Turkmenistan             |
| <b>BF</b> | Burkina Faso             | <b>GR</b> | Greece                                   | <b>ML</b> | Mali   | <b>TR</b> | Turkey                   |
| <b>BG</b> | Bulgaria                 | <b>HU</b> | Hungary                                  | <b>MN</b> | Mongolia                                     | <b>TT</b> | Trinidad and Tobago      |
| <b>BJ</b> | Benin                    | <b>IE</b> | Ireland                                  | <b>MR</b> | Mauritania                                   | <b>UA</b> | Ukraine                  |
| <b>BR</b> | Brazil                   | <b>IL</b> | Israel                                   | <b>MW</b> | Malawi                                       | <b>UG</b> | Uganda                   |
| <b>BY</b> | Belarus                  | <b>IS</b> | Iceland                                  | <b>MX</b> | Mexico                                       | <b>US</b> | United States of America |
| <b>CA</b> | Canada                   | <b>IT</b> | Italy                                    | <b>NE</b> | Niger  | <b>UZ</b> | Uzbekistan               |
| <b>CF</b> | Central African Republic | <b>JP</b> | Japan                                    | <b>NL</b> | Netherlands                                  | <b>VN</b> | Viet Nam                 |
| <b>CG</b> | Congo                    | <b>KE</b> | Kenya                                    | <b>NO</b> | Norway                                       | <b>YU</b> | Yugoslavia               |
| <b>CH</b> | Switzerland              | <b>KG</b> | Kyrgyzstan                               | <b>NZ</b> | New Zealand                                  | <b>ZW</b> | Zimbabwe                 |
| <b>CI</b> | Côte d'Ivoire            | <b>KP</b> | Democratic People's<br>Republic of Korea | <b>PL</b> | Poland                                       |           |                          |
| <b>CM</b> | Cameroon                 | <b>KR</b> | Republic of Korea                        | <b>PT</b> | Portugal                                     |           |                          |
| <b>CN</b> | China                    | <b>KZ</b> | Kazakstan                                | <b>RO</b> | Romania                                      |           |                          |
| <b>CU</b> | Cuba                     | <b>LC</b> | Saint Lucia                              | <b>RU</b> | Russian Federation                           |           |                          |
| <b>CZ</b> | Czech Republic           | <b>LI</b> | Liechtenstein                            | <b>SD</b> | Sudan  |           |                          |
| <b>DE</b> | Germany                  | <b>LK</b> | Sri Lanka                                | <b>SE</b> | Sweden                                       |           |                          |
| <b>DK</b> | Denmark                  | <b>LR</b> | Liberia                                  | <b>SG</b> | Singapore                                    |           |                          |
| <b>EE</b> | Estonia                  |           |  |           |  |           |                          |

**DEVICE AND METHOD FOR COMMUNICATING POWER CONTROL  
SIGNALS IN MOBILE COMMUNICATION SYSTEM**

**BACKGROUND OF THE INVENTION**

5        **1. Field of the Invention**

The present invention relates generally to a mobile communication system and, more particularly, to a device and method for communicating power control signals within a given interval on a single code channel, to separately control the transmission power of multiple mobile stations.

10       **2. Description of the Related Art**

It is generally known that in order to transmit power control bits (PCBs) for a plurality of mobile stations on a single forward link code channel, a base station assigns time slots to the individual mobile stations and sends the PCBs for the mobile stations at the corresponding time slots. That is, in the case where the base  
15 station transmits PCBs for a plurality of mobile stations on the forward link, the base station assigns a plurality of specific time slots to the respective mobile stations without exception, which results in a waste of time slot resources when some of transmission code channels of mobile station are not in use.

**SUMMARY OF THE INVENTION**

20       It is, therefore, an object of the present invention to provide a device and

- 2 -

method for communicating power control signals on a single code channel in a mobile communication system, wherein the power control signals can be used to separately control transmission power for a plurality of mobile stations.

It is another object of the present invention to provide a transmission device  
5 and method for a base station, which transmits power control signals within a given interval of a transmission signal on a single code channel in a mobile communication system, wherein PCB patterns for a plurality of mobile stations are added to the power control signals.

It is a further object of the present invention to provide a receiving device  
10 and method for a mobile station in a mobile communication system, which extracts power control signals within a given interval of a reception signal on a single code channel and multiplies the extracted power control signal by a user pattern assigned to the receiving device to decide a PCB directed to the receiving device.

To achieve the above object of the present invention, there is provided a  
15 power control device and an associated method for a mobile communication system including a base station transmitter and a mobile station receiver, wherein the base station transmitter includes: a plurality of PCB pattern generators for multiplying PCBs for a plurality of mobile stations by user patterns assigned to the respective mobile stations, to generate PCB patterns for the respective mobile stations, wherein  
20 the user patterns are orthogonal with one another; an adder for adding up the PCB patterns from the plural PCB pattern generators to generate a power control signal; and a transmitter for modulating the power control signal received from the adder and transmitting the modulated power control signal, wherein the mobile station receiver includes: a power control signal extractor for extracting the power control  
25 signal within a given time interval of a reception signal received on a single code

channel, wherein PCB patterns for a plurality of mobile stations are included in the power control signal; a PCB pattern generator for multiplying the power control signal by the user pattern assigned to the mobile station itself, to extract the PCB pattern of the mobile station; and a decider for generating PCBs in accordance with  
5 a signal level of the extracted PCB pattern.

### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which like reference numerals  
10 indicate like parts. In the drawings:

FIG. 1 is a block diagram illustrating a base station transmitter for use in a mobile communication system according to an embodiment of the present invention; and

FIG. 2 is a block diagram illustrating a mobile station receiver for use in a  
15 mobile communication system according to an embodiment of the present invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A preferred embodiment of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following  
20 description, well known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

FIG. 1 illustrates a base station transmitter for transmitting power control signals within a given interval of a transmission signal on a single code channel in

a mobile communication system, wherein PCB patterns for a plurality of mobile stations are multiplexed with the power control signals, according to an embodiment of the present invention.

Referring to FIG. 1, a transmission data generator 118 includes a channel  
5 encoder and an interleaver (not shown), for encoding transmission data as a frame unit to generate symbol data.

A multiplier 111 multiplies a PCB (+1 or -1) for a user A by a transmission gain to generate a gain controlled PCB for the user A. A multiplier 112 multiplies a PCB for a user B by a transmission gain to generate a gain controlled PCB for the  
10 user B. A multiplier 113 multiplies the gain controlled PCB from the multiplier 111 by a pattern for the user A to generate a PCB pattern for the user A. A multiplier 114 multiplies the gain-controlled PCB from the multiplier 112 by a pattern for the user B to generate a PCB pattern for the user B. Here, the PCB patterns for the user A and user B are orthogonal with each other, because the corresponding patterns for  
15 user's A and B are orthogonal.

Although the present embodiment illustrates PCBs for two users, it will be understood by those skilled in the art that the invention is not limited to two users. To support additional users, the method of the present invention would simply employ additional PCBs and user pattern bits, corresponding to the number of  
20 additional users.

A selector 115 selects the PCBs to be transmitted in accordance with a control signal and outputs them to an adder 116. The adder 116 adds the PCBs received from the selector 115 to generate a power control signal.

- 5 -

A multiplexer 117 multiplexes outputs of the transmission data generator 118 and the adder 116. In a CDMA 2000 system, the multiplexer 117 inserts the power control signal at a particular position of the transmission data after puncturing; in a UMTS (Universal Mobile Telecommunication System), the multiplexer 117  
5 multiplexes the transmission data and the power control signal.

A spectrum spreader 119 spreads an output of the multiplexer 117, for example, by orthogonal code spreading or PN code spreading. An RF (Radio Frequency) transmitter 120 modulates the spread signal from the spreader 119 into an RF signal and transmits the modulated RF signal via a transmit antenna.

10 Now, reference will be made to the procedures at the base station for transmitting the power control signals, with PCB patterns for a plurality of users added thereto, within a given interval of a signal to be transmitted on a single code channel, in connection with FIG. 1.

First, it is assumed that: (1) a pattern for the user A is (+1,+1) and a pattern  
15 for the user B is (+1,-1); (2) the PCB for the user A is (+1,+1), (i.e., a power-up signal) and the PCB for the user B is (-1,-1), (i.e., a power-down signal); and (3) the multipliers 111 and 112 multiply the respective PCBs by a gain of 1.

For the example above, the PCB pattern for user A output through the multipliers 111 and 113 is (+1,+1) and the PCB pattern for the user B output  
20 through the multipliers 112 and 114 is (-1,+1). These PCB patterns are selected by the selector 115 and output to the adder 116. Then, the adder 116 adds the PCB patterns generated from the multipliers 112 and 114 to generate a power control signal (0,+2) that would be finally transmitted. The multiplexer 117 multiplexes the power control signal (0,+2) output from the adder 116 to the transmission data from

- 6 -

the transmission data generator 118 and outputs the multiplexed power control signal to the spreader 119. Then, the spreader 119 spreads the multiplexed power control signal by orthogonal code spreading or PN code spreading. The RF transmitter 120 converts the spread baseband signal to an RF signal and transmits  
 5 the RF signal via a transmit antenna.

The PCB patterns generated in accordance with the user patterns are shown in Table 1.

[Table 1]

|    |              |   |                                       |
|----|--------------|---|---------------------------------------|
| 10 | User Pattern | PCB   | PCB Pattern According to User Pattern |
|    | User A (00)  | " +1+1 " (Increase in Tx Power of Mobile Station) | +1+1                                  |
|    | User B (01)  | " +1+1 " (Increase in Tx Power of Mobile Station) | +1-1                                  |
| 15 | User A (00)  | " -1-1 " (Decrease in Tx Power of Mobile Station) | -1-1                                  |
|    | User B (01)  | " -1-1 " (Decrease in Tx Power of Mobile Station) | -1+1                                  |

Referring to FIG. 2, a description will be provided for a mobile station  
 20 receiver which determines the specific PCBs directed to itself by extracting a power control signal within a particular interval of a reception signal from the base station and multiplying the extracted power control signal by a unique user pattern specific to the mobile station (See Col. 1 of Table 1).



- 7 -

First, an RF receiver 211 converts an RF signal, received from the base station via an antenna, to a baseband signal. A spectrum despreaders 212 performs complex PN despreaders or orthogonal code despreaders for the baseband signal. A power control signal extractor 213 extracts a power control signal from the output  
5 signal of the despreaders 212. The power control signal extractor 213 outputs the extracted power control signal to a multiplier 215 and also to a reception data detector 214.

A user pattern generator 216 generates a user pattern assigned to the mobile station through prior negotiations with the base station. The multiplier 215  
10 multiplies the extracted power control signal by the user pattern generated from the user pattern generator 216 to generate a PCB pattern as input to an integrator. An integrator 217 integrates the output of the multiplier 215.

A channel estimator 218 estimates a channel being currently used and outputs a complex signal. A conjugate complex number generator 219 conjugates  
15 the outputs of the channel estimator 218 to generate a conjugate signal. A multiplier 220 multiplies an output signal of the integrator 217 by an output signal of the conjugate complex number generator 219 so as to compensate for signal distortion.

A decider 221 decides power control commands by comparing the output  
20 signal level of the multiplier 220 with a predetermined threshold and provides the result to a system controller (not shown). Thereafter, the system controller controls transmission power of the mobile station in accordance with the power control commands.

25 Referring now to FIG. 2, a more detailed description will be provided regarding the operation of the mobile station for extracting a power control signal

within a given interval of the reception signal and multiplying the extracted power control signal by the unique user pattern so as to decide PCBs for itself.

It is assumed herein that: (1) the base station assigns a particular user pattern for the mobile station associated with user A, (e.g., 00 (+1,+1)). The base station then sends a power-up PCB (+1,+1) to the mobile station; and (2) the base station assigns a user pattern for user B, (e.g., (+1,-1)). The base station then sends a power-down PCB (-1,-1) to the mobile station associated with user B. For the present example, the base station adds up the PCB patterns for the two users A and B (+1,+1) and (-1,-1), respectively, and sends a power control signal (0,+2) to the mobile station.

The RF receiver 211 then converts an RF signal, received via the antenna, to a baseband signal. The spectrum despreader 212 performs a complex PN despreading or an orthogonal code despreading on the baseband signal, and the power control signal extractor 213 extracts a power control signal from the output signal of the despreader 212. The power control signal extractor 213 outputs an extracted power control signal to the multiplier 215 and also, to the reception data detector 214.

The method for determining the transmission power of a mobile station based on the extracted power control signal is as follows. First, under ideal channel conditions, the input signal of the multiplier 215 is (0,+2). That is, the multiplier 215 multiplies the output signal (0,+2) of the power control signal extractor 213 by the output (+1,+1) of the user pattern generator 216 to generate a signal (0,+2). This signal is integrated at the integrator 217 to produce a value of +2. Here, it can be seen from the positive symbol of the signal that the base station sent a power-up command. However, transmission signals in a radio system may be accompanied

by delays or magnitude and phase distortions associated with poor channel conditions that disable successful reception of the signal at the reception party. When this occurs, the reception party (i.e., mobile station) must estimate the current channel state from the received signal and store the estimated values for the current  
5 channel state to accurately demodulation of the received signal into the original transmission signal.

That is, the value of +2 calculated at the integrator 217 is not an actual value but a theoretical one obtained under the assumption that the channel conditions are ideal. In order to accurately decide the power control command transmitted, there  
10 is a need to compensate for the distorted value. Compensation for the distorted value is performed at the multiplier 220. That is, after estimation of the current channel state, the channel estimator 218 measures the magnitude and phase distortions of the received signal. The conjugate complex number generator 219 conjugates the output signal of the channel estimator 218 to generate a conjugate  
15 signal for compensation of the channel. Then, the multiplier 220 multiplies the output signal of the integrator 217 by the output signal of the conjugate complex number generator 220 to generate a signal compensated for magnitude and phase distortions. Then, the decider 221 decides the PCB from the PCB pattern compensated for channel distortion and provides the decision result for the system  
20 controller. Thereafter, the system controller controls transmission power of the mobile station based on the information provided by the decider 221.

In summary, as previously described above, in order to simultaneously control the transmission power for a plurality of mobile stations in a mobile communication system, the base station simultaneously transmits power control  
25 bits, to control the transmission power for each mobile stations. The power control bits are multiplied by user patterns which is orthogonal with each other then form

- 10 -

a power control signal and transmitted within a particular time interval of a single code channel. Upon receiving the power control signal, the individual mobile station decides the power control command for itself by multiplying the power control signals extracted within the particular interval by its unique user pattern  
5 which is orthogonal with the user patterns of the other mobile stations. As a consequence, the present invention discloses an effective method for controlling the transmission power for a plurality of mobile stations at the base station to cope with two situations: first, where the totality of plural mobile stations transmit code channels to the base station either simultaneously or differently in time; and second,  
10 where the mobile stations transmit some of the code channels simultaneously and the others differently in time.

Although the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing  
15 from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A base station transmitter comprising:  
a plurality of power control bit (PCB) pattern generators for generating PCBs  
to control the power of a plurality of mobile stations, said generated PCBs being  
5 multiplied by orthogonal user patterns assigned to the respective mobile stations,  
to generate PCB patterns for the respective mobile stations;  
an adder for adding up the PCB patterns to generate a power control signal;  
and  
a multiplexer for multiplexing the power control signal with a transmission  
10 data to form a combined signal; and  
a transmitter for spreading the combined signal and transmitting the  
combined signal.
2. The base station transmitter as claimed in claim 1, wherein said  
multiplexer is implemented by a puncturer/insertor provided between the adder and  
15 the transmitter, for inserting the power control signal at a particular position of the  
transmission data.
3. The base station transmitter as claimed in claim 1, wherein said  
multiplexer multiplexes the power control signal and the transmission data.
4. The base station transmitter as claimed in claim 1, wherein the PCB  
20 pattern corresponds to the user pattern.
5. The base station transmitter as claimed in claim 1, wherein the user  
patterns are orthogonal with one another.
6. The base station transmitter as claimed in claim 3, wherein a user

pattern is assigned to a mobile station in a prior negotiation.

7. A mobile station receiver comprising:

a power control signal extractor for extracting a power control signal within a given interval of a reception signal received on a code channel;

5 a PCB pattern generator for multiplying the extracted power control signal by a user pattern assigned to the mobile station, to extract the PCB pattern of the mobile station; and

a decider for determining a PCB in accordance with a signal level of the extracted PCB pattern.

10 8. The mobile station receiver as claimed in claim 7, further comprising a distortion compensator provided between the PCB pattern generator and the decider, for multiplying the extracted PCB pattern by a conjugate signal derived from a channel estimator to generate a distortion compensated PCB pattern.

9. The mobile station receiver as claimed in claim 7, wherein the PCB  
15 pattern corresponds to the user pattern.

10. The mobile station receiver as claimed in claim 7, wherein the user patterns are orthogonal.

11 The mobile station receiver as claimed in claim 9, wherein a user pattern is assigned to a mobile station in a prior negotiation.

20 12. A power control device for a mobile communication system, comprising:

a base station transmitter and a mobile station receiver,

- 13 -

wherein the base station transmitter comprises:

a plurality of PCB pattern generators for generating PCBs to control the power of a plurality of mobile stations, said generated PCBs being multiplied by orthogonal user patterns to generate PCB patterns for the respective mobile stations;

5 an adder for adding the generated PCB patterns;

a multiplexer for multiplexing the power control signals with transmission data to form a combined signal; and

a transmitter for modulating the combined signal and transmitting the combined signal,

10 wherein the mobile station receiver comprises:

a power control signal extractor for extracting the power control signal within a given interval of a reception signal received on a code channel;

a PCB pattern generator for multiplying the power control signal by the user pattern assigned to the mobile station, to extract a PCB pattern of the mobile station;

15 and

a decider for determining PCBs in accordance with a signal level of the extracted PCB pattern.

13. A transmission method for a base station, comprising the steps of:

(a) multiplying PCBs corresponding to each of a plurality of mobile stations  
20 by orthogonal user patterns assigned to the respective mobile stations, to generate PCB patterns for the respective mobile stations;

(b) adding the generated PCB patterns to generate a power control signal;

(c) multiplexing the power control signal with a transmission data to form a combined signal; and

25 (d) modulating the combined signal and transmitting the modulated combined signal.

14. The transmission method as claimed in claim 13, wherein the step of the multiplexing is operated, by puncturing the transmission data at a particular position and inserting the power control signal at the punctured position.

5 15. The transmission method as claimed in claim 13, wherein the step of the multiplexing is operated by multiplexing the power control signal and the transmission data.

16. The transmission method as claimed in claim 15, wherein the PCB pattern corresponds to the user pattern.

10 17. The transmission method as claimed in claim 13, wherein the user patterns are orthogonal with one another.

18. The transmission method as claimed in claim 13, wherein the user patterns are assigned to the mobile stations by way of a prior negotiation.

19. A reception method for a mobile station, comprising the steps of:

15 (a) extracting a power control signal within a given interval of a reception signal received on a code channel, wherein the power control signal include PCB patterns for a plurality of mobile station;

(b) multiplying the power control signal by a user pattern assigned to the mobile station itself, to extract the PCB pattern of the mobile station; and

20 (c) generating PCB in accordance with a signal level of the extracted PCB pattern.

20. The reception method as claimed in claim 19, further comprising the



step of multiplying the PCB pattern by a conjugate signal resulting from channel estimation to generate a distortion compensated PCB pattern.

21. The reception method as claimed in claim 19, wherein the PCB pattern corresponds to the user pattern.

5        22. The reception method as claimed in claim 19, wherein the user patterns are orthogonal with one another.

23. The reception method as claimed in claim 19, wherein the user patterns is assigned to the mobile stations in a prior negotiation.

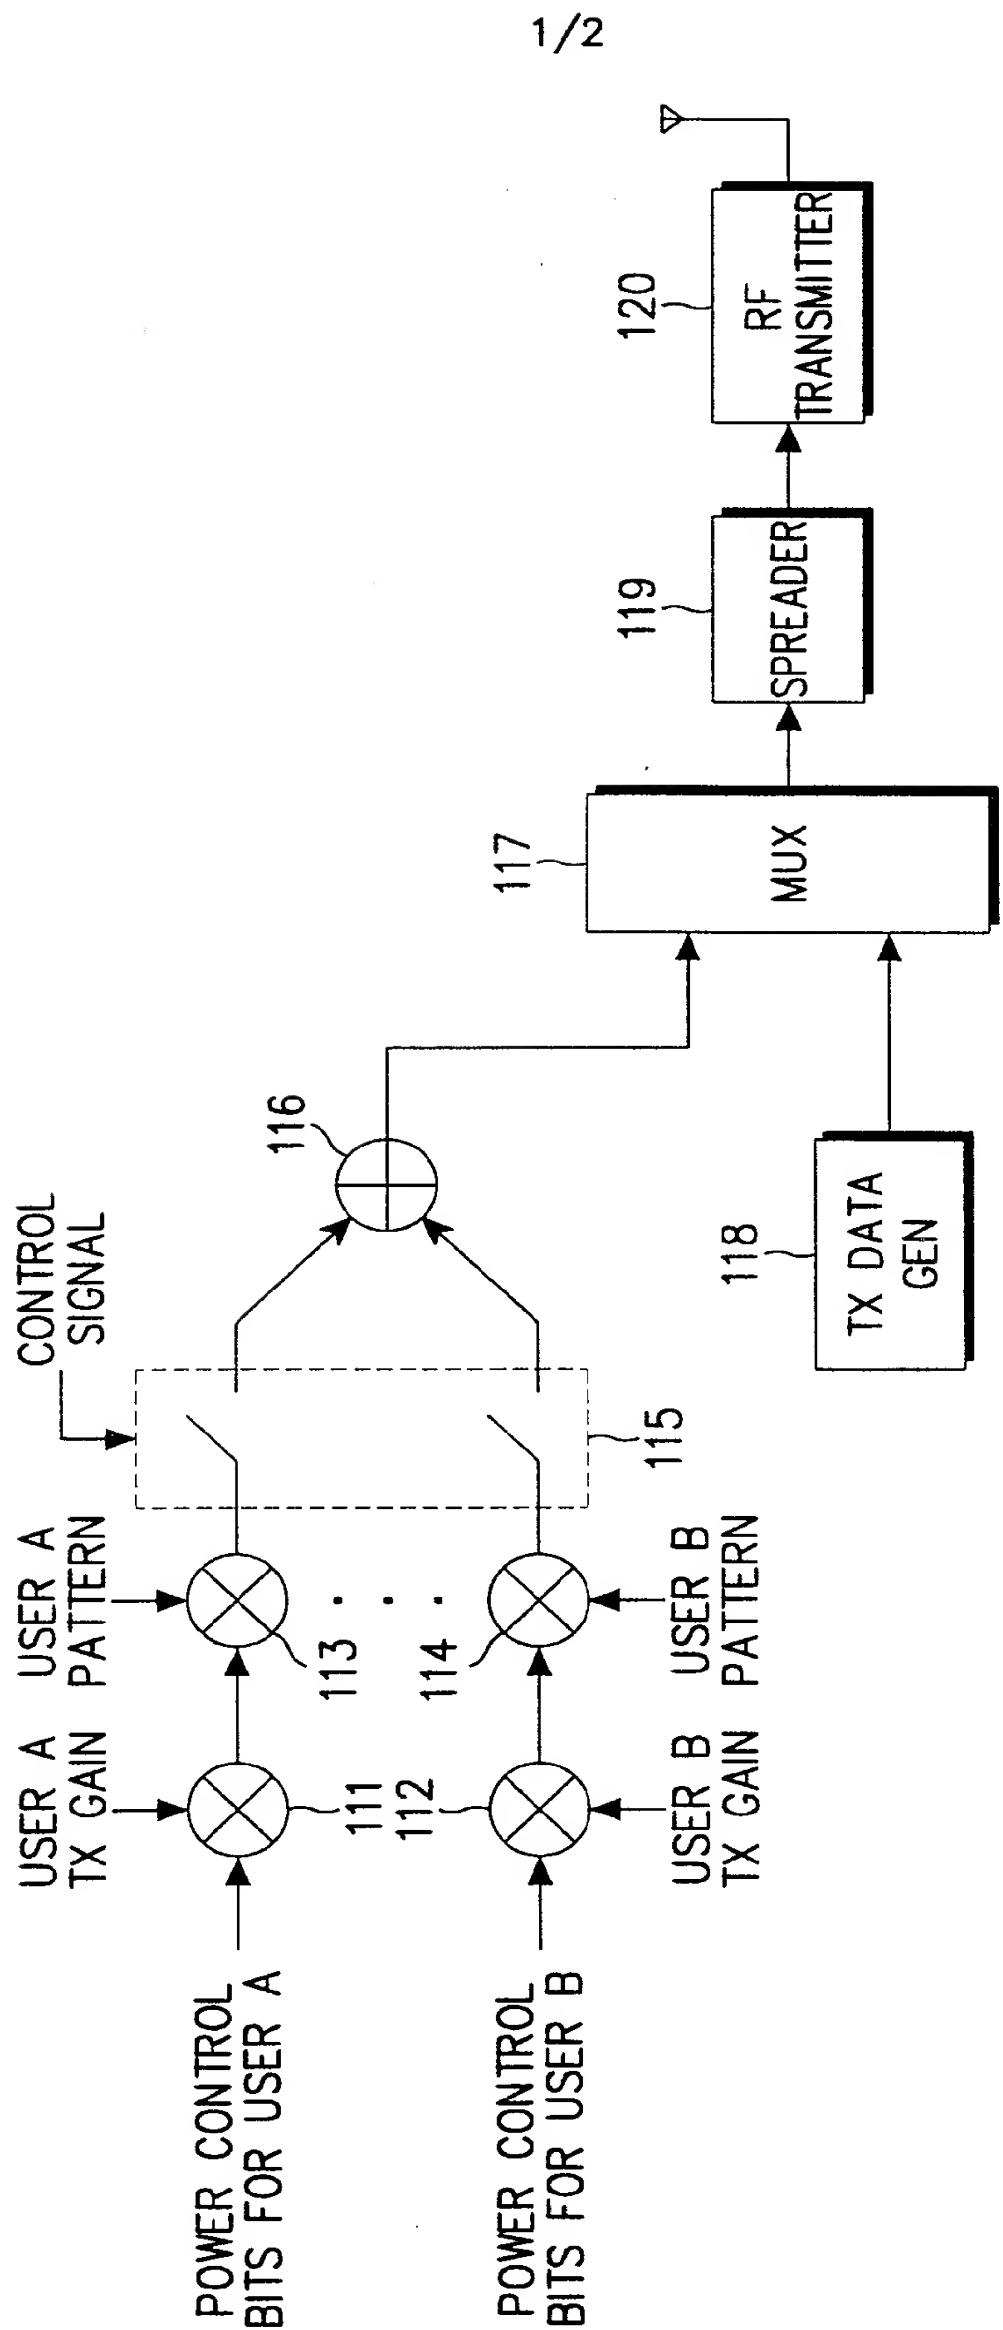


FIG. 1

2/2

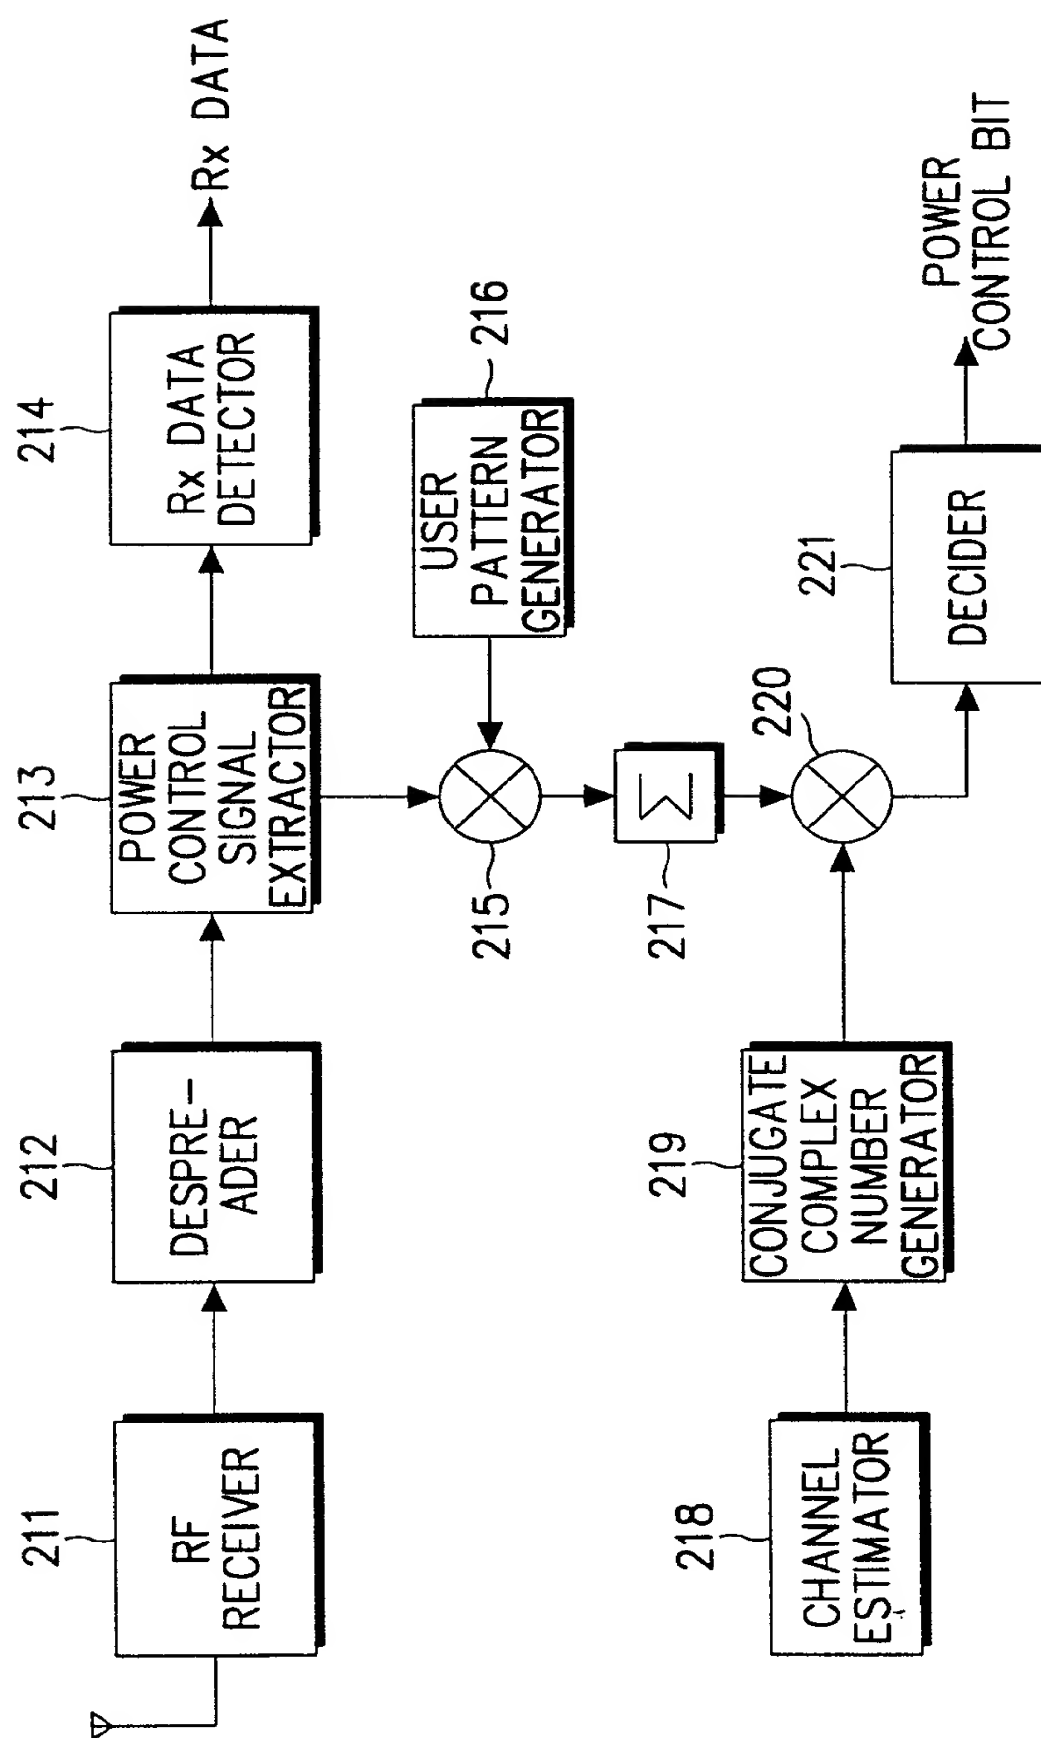


FIG. 2

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00313

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>6</sup>: H 04 B 7/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>6</sup>: H 04 B 7/00 7/216, H 04 Q 7/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|-----------|---|-----------------------|
| A         | US 5 570 353 A (I. Keskitalo et al.) 29 October 1996 (29.10.96) totality.           | 1-23                  |
| A         | US 5 737 327 A (F. Ling et al.) 07 April 1998 (07.04.98), Description.<br><br>----- | 1-23                  |

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

23 September 1999 (23.09.99)

Date of mailing of the international search report

08 November 1999 (08.11.99)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Zugarek

Telephone No. 1/53424/383

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00313

| Im Recherchenbericht<br>angeführtes Patentdokument<br>Patent document cited<br>in search report<br>Document de brevet cité<br>dans le rapport de recherche | Datum der<br>Veröffentlichung<br>Publication<br>date<br>Date de<br>publication | Mitglied(er) der<br>Patentfamilie<br>Patent family<br>member(s)<br>Membre(s) de la<br>famille de brevets | Datum der<br>Veröffentlichung<br>Publication<br>date<br>Date de<br>publication  |
|--|--|--|---|
| US A   | 5570353  | 29-10-1996   | WO A1 9519664 20-07-1995<br>AU A1 14176795 01-08-1995<br>AU B2 681483 28-08-1997<br>EP A1 688479 27-12-1995<br>JP T2 8507670 13-08-1996<br>NO A0 953572 11-09-1995<br>NO A 953572 10-11-1995<br>CN A 1122175 08-05-1996<br>FI A0 940148 12-01-1994<br>FI B 94579 15-06-1995<br>FI C 94579 25-09-1995  |
| US A   | 5737327  | 07-04-1998   | CN A 1185063 17-06-1998<br>DE A1 19712830 06-11-1997<br>FR A1 2746990 03-10-1997<br>GB A0 9705960 07-05-1997<br>GB A1 2311702 01-10-1997<br>JP A2 10032560 03-02-1998<br>US A 5799011 25-08-1998<br>BR A 9704890 24-11-1998<br>CN A 1192089 02-09-1998<br>GB A0 9719113 12-11-1997<br>GB A1 2322773 02-09-1998<br>JP A2 10242906 11-09-1998 |